

SPECIFICATION

Current Rate: 1 AMP

Insulation Resistance: 50mΩMin

Contact Resistance: 20mΩMax

Dielectric voltage: 250V AC for one minute

Operation Temperature: -20°C to +85°C









MATERIAL

Insulator: Polyester, UL94v-0

Standard: P.B.T

Contact Pin: Phosphor Bronze

Finish: Tin Plated

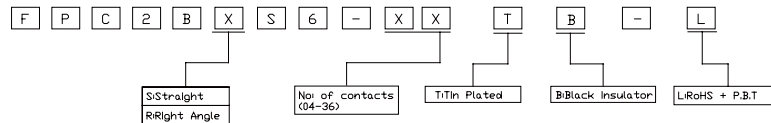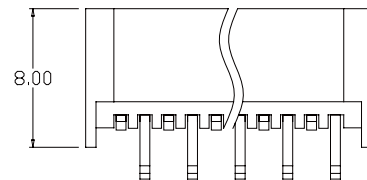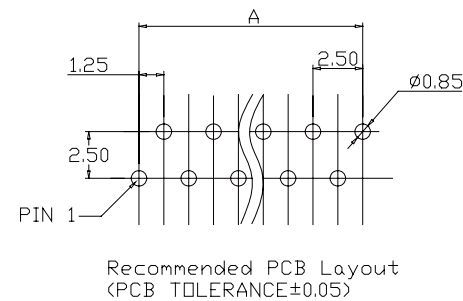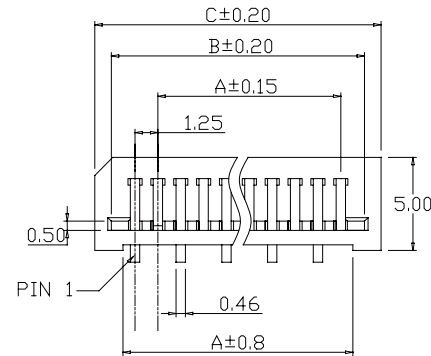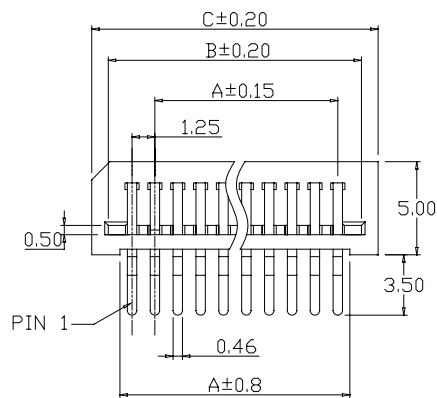

Conact	A	B	C
04	3.75	6.30	8.40
05	5.00	7.55	9.65
06	6.25	8.80	10.90
07	7.50	10.05	12.15
08	8.75	11.30	13.40
09	10.00	12.55	14.65
10	11.25	13.80	15.90
11	12.50	15.05	17.15
12	13.75	16.30	18.40
13	15.00	17.55	19.65
14	16.25	18.80	20.90
15	17.50	21.30	22.15
16	18.75	20.05	23.40
17	20.00	22.55	24.65
18	21.25	23.80	25.90
19	22.50	25.05	27.15
20	23.75	26.30	28.40
21	25.00	27.55	29.65
22	26.25	28.80	30.90
23	27.50	30.05	32.15
24	28.75	31.30	33.40
25	30.00	32.55	34.65
26	31.25	33.80	35.90
27	32.50	35.05	37.15
28	33.75	36.30	38.40
29	35.00	37.55	39.65
30	36.25	38.80	40.90
31	37.50	40.05	42.15
32	38.75	41.30	43.40
33	40.00	42.55	44.65
34	41.25	43.80	45.90
35	42.50	45.05	47.15
36	43.75	46.30	48.40

APPRO

CHECK

DRAWN

PART NO.

FPC2BXS6-XXTB-L

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069

E-mail: sales@vigortec.com