



SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 3 Amperes
 Dielectric Withstanding Voltage: AC 1000
 Insulation Resistance: 5000 Megohms Minimum
 Contact Resistance: 25 Milliohms Maximum
 Operating Temperature: -55°C to +105°C

MATERIALS

Contacts: Brass
 Insulator: P.B.T UL 94V-0 Rated
 Shell: Cold Roller Steel
 FINISHES:
 Contact: Gold Flash
 Shell: Nickel Plated

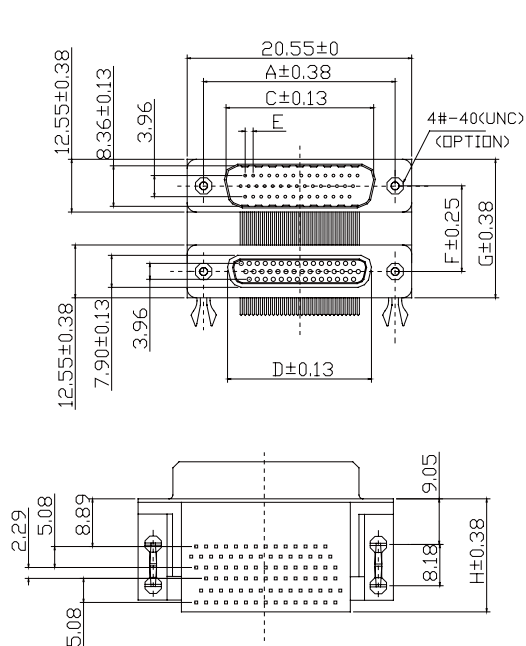

Dimensions

POSITION	A	B	C	D	E	F	G	H
15	30.81	24.99	16.92	16.33	2.29	15.88	28.40	22.70
26	39.14	33.32	25.50	24.66	2.29			
44	53.04	47.04	38.96	38.38	2.29	19.05	31.60	23.00
62	69.32	63.50	55.42	54.84	2.41			

ORDER INFORMATION

☒ H	☒ D	☒ B	☒ R	☒ X	☒ -	☒ X	☒ X	☒ X	☒ X	☒ X	☒ B	☒ X	☒ X	☒ -	☒ L				
☐ Backing Interconnect Conn. A15.88mm B19.05mm		☐ Male(Top Conn.) Female(Bottom Conn.)		☐ No. of contacts (15,26,44,62)		☐ Male(Top Conn.) Female(Bottom Conn.)		☐ No. of contacts (15,26,44,62)		☐ SS Selective SS Selective 20u" SS Selective 30u"		☐ Black Insulator 17th Shell Nickel Shell		☐ Board Mounting Alone Board Mount Block Board Mount Block		☐ Alone 8 Rivet 8 Rivet & Jack screw attached 8 Rivet & Jack screw insert		☐ Leadwire P.B.T.	

APPRO	CHECK	DRAWN	PART NO.	DHDBRX-XXXXXXXXBXXX-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
			Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com					