

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,8	1.0




SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 1 Amperes
 Dielectric Withstanding Voltage: AC 500
 Insulation Resistance: 1000 Megohms Minimum
 Contact Resistance: 35 Milliohms Maximum
 Operating Temperature: -55°C to +85°C

MATERIALS


Contacts: Brass
 Insulator: P.B.T UL 94V-0 Rated
 Bracket: Zinc Alloy, Grade 3
 Metal Clip: Brass
FINISHES:
 Contact: Gold Flash
 Bracket: Nickel Plated

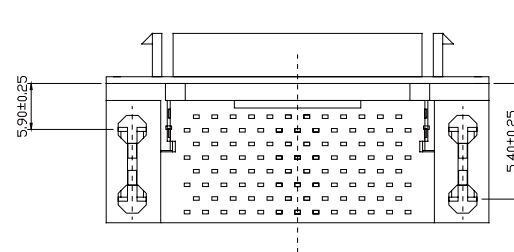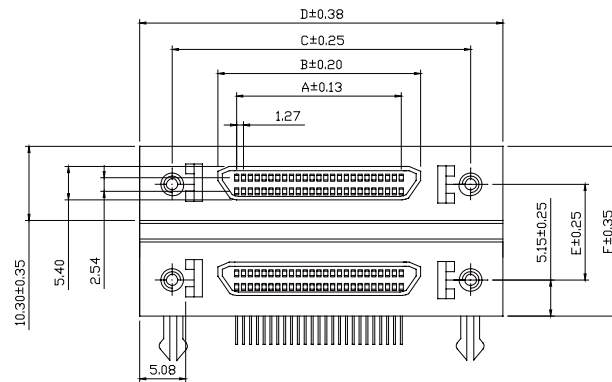

Dimensions

POSITION	A	B	C	D	E	F
26	15.24	19.46	37.21	31.24	12.80	23.10
50	39.14	33.32	25.50	24.66	25.54	25.54
68	53.04	47.04	38.96	38.38	29.35	29.35

ORDER INFORMATION

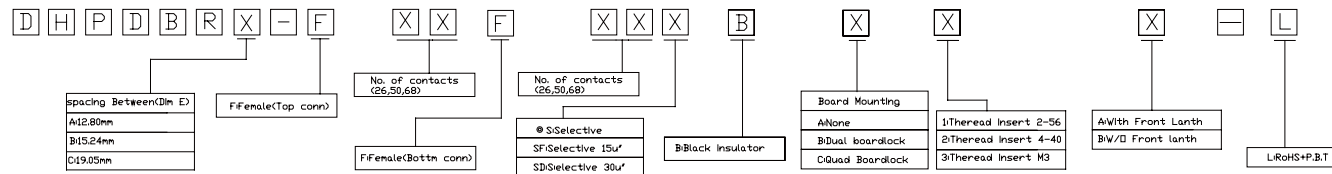

APPRO	CHECK	DRAWN	PART NO.	DHPDBRX-FXXFXXXFBXXX-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
			Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com					