


PAGE	223	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,8	1.0

SPECIFICATION
Current Rate: 3 AMP
Insulation Resistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -55°C to +105°C



MATERIAL
Insulator: Polyester,UL94v-0
©Standard: P.B.T
Contact Pin F: Phosphor Bronze
M: Brass
Shell-Steel zinc plated or tin plated or
nickel plated Screw-Brass nickel plated

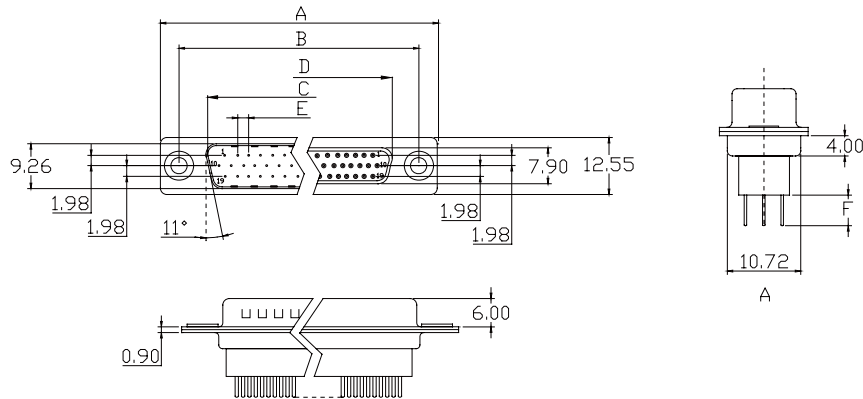

Dimensions

POSITION	A	B	C	D	E	F	G	H
15	30.81	24.99	16.92	16.33	2.29	3.80	9.60	0.25
26	39.14	33.32	25.50	24.66	2.29			0.51
44	53.04	47.04	38.96	38.38	2.29	5.30	11.00	0.51
62	69.32	63.50	55.42	54.84	2.41			0.58

ORDER INFORMATION

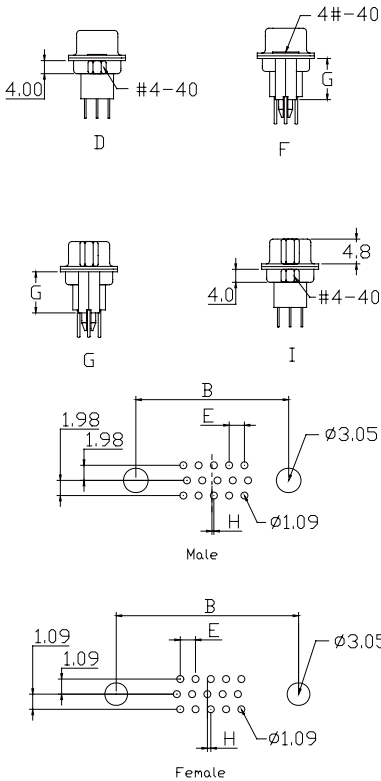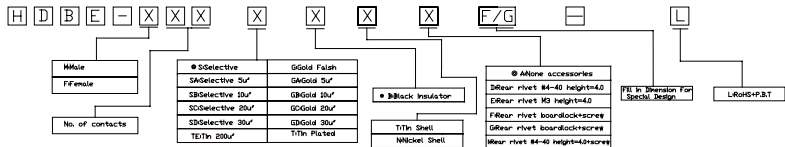

Recommended PCB Layout
(PCB TOLERANCE±0.05)

APPRO	CHECK	DRAWN	PART NO.	HDBE-XXXXXXXF/G-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
							Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	