





SPECIFICATION

Current Rate: 3 AMP
Insulation Resistance: 1000m Ω Min
Contact Resistance: 20m Ω Max
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -55°C to +105°C





MATERIAL

Insulator: Polyester,UL94v-0
 ©Standard: P.B.T
 Contact Pin F: Phosphor Bronze
 M: Brass
 Shell-Steel zinc plated or tin plated or
 nickel plated Screw-Brass nickel plated

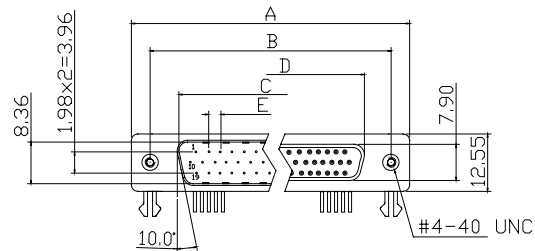



Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

ORDER INFORMATION



4

I



0

I

Dimensions

POSITION	A	B	C	D	E	F
15	30.81	24.99	16.92	16.33	2.29	0.25
26	39.14	33.32	25.50	24.66	2.29	0.51
44	53.04	47.04	38.96	38.38	2.29	0.51
62	69.32	63.50	55.42	54.84	2.41	0.58

APPRO	CHECK	DRAWN	PART NO.	HDBR-XXXXXX1X-L			DESCRIPTION		
			ITEM NO.						Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.				