



PAGE	210	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,8	1.0

SPECIFICATION




Current Rate: 1 AMP
Insulation Resistance: 500mΩMin
Contact Resistance: 35mΩMax
Dielectric voltage: 500V AC for one minute
Operation Temperature: -55°C to +105°C

MATERIAL



Insulator: Polyester,UL94v-0
Standard: P.B.T
Contact Pin: Brass Tin plated over copper

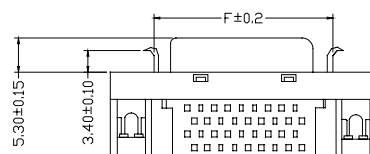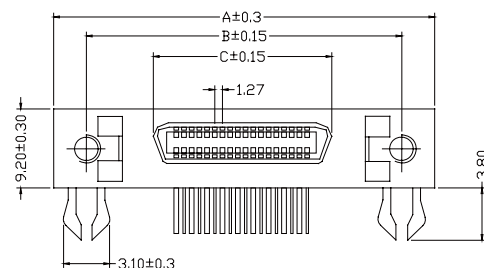


With front latch

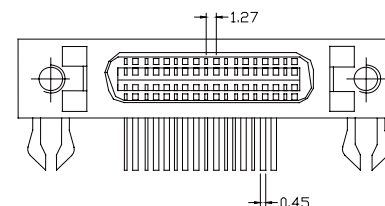

Without front latch

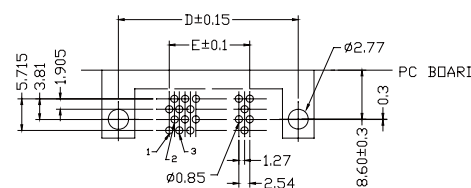


Recommended PCB Layout 20,36,68P
(PCB TOLERANCE±0.05)

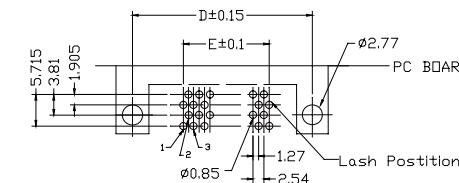

Recommended PCB Layout 14,26,50P
(PCB TOLERANCE±0.05)


ORDER INFORMATION

H P C E N R - M

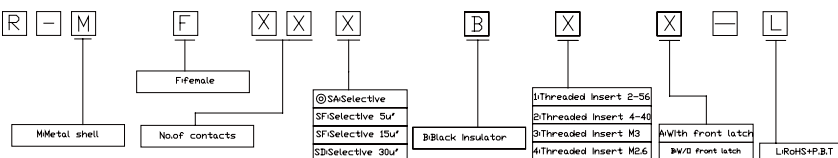

Dimensions

POSITION	A	B	C	D	E	F
14	29.57	23.64	12.63	23.64	7.62	17.02
20	33.38	27.45	16.44	27.45	11.43	20.83
26	37.19	31.26	20.25	31.26	15.24	24.64
36	43.54	37.61	26.60	37.61	21.59	30.99
50	53.43	46.50	35.49	46.50	30.48	39.88
68	63.86	57.93	46.92	57.93	41.91	51.30

APPRO	CHECK	DRAWN	PART NO.	HPCENR-MFXXXBXX-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	