
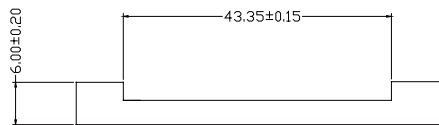
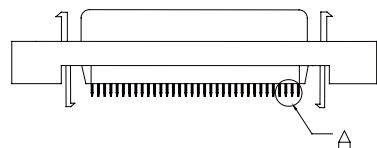



PAGE	214	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,8	1.0

SPECIFICATION
Current Rate: 1 AMP
Insulation Resistance: 500mΩMin
Contact Resistance: 35mΩMax
Dielectric voltage: 500V AC for one minute
Operation Temperature: -55°C to +105°C




MATERIAL
Insulator: Polyester,UL94v-0
Standard: P.B.T
Contact Pin: Brass Tin plated over copper

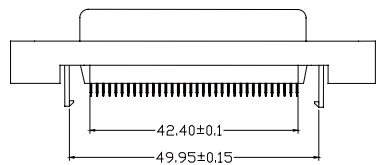




Cover



View A

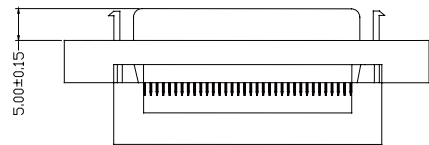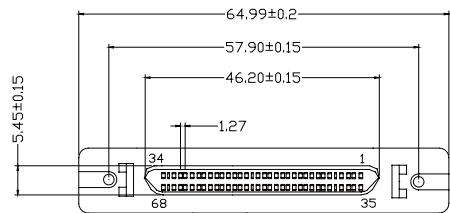

With front latch

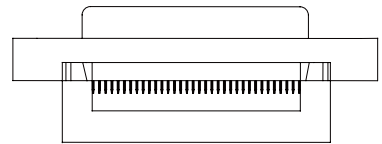

Without front latch

ORDER INFORMATION

H	P	D	B	I	-	M	F	6	8	X	B	X	X	=	L
Metal shell						Female		No. of contacts		250V	250V	250V	250V	250V	250V
Metal shell						Female		No. of contacts		250V	250V	250V	250V	250V	250V

APPRO	CHECK	DRAWN	PART NO.	HPDBI-MF68XBXX-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
							Tel: 0769 22020068 Fax: 0769 22020069	E-mail: sales@vigortec.com