



PAGE	215	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,8	1.0

SPECIFICATION

Current Rate: 1 AMP
Insulation Resistance: 500mΩ Min
Contact Resistance: 35mΩ Max
Dielectric voltage: 500V AC for one minute
Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: Polyester,UL94v-0
©Standard: P.B.T
Contact Pin: Brass Tin plated over copper

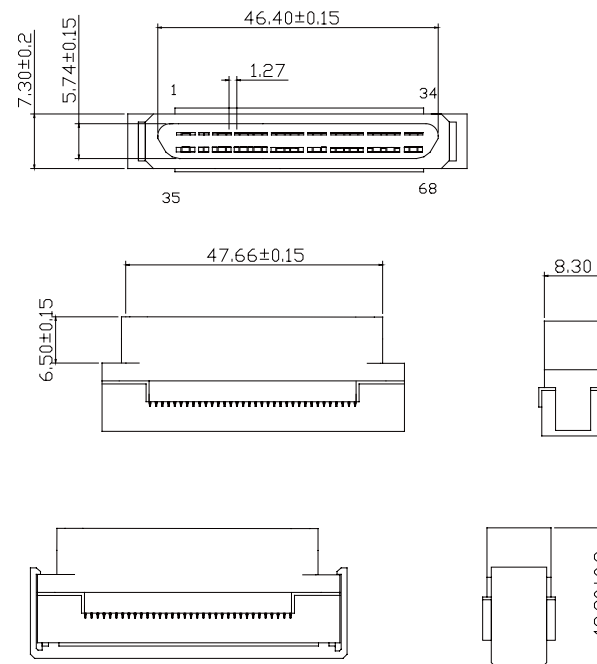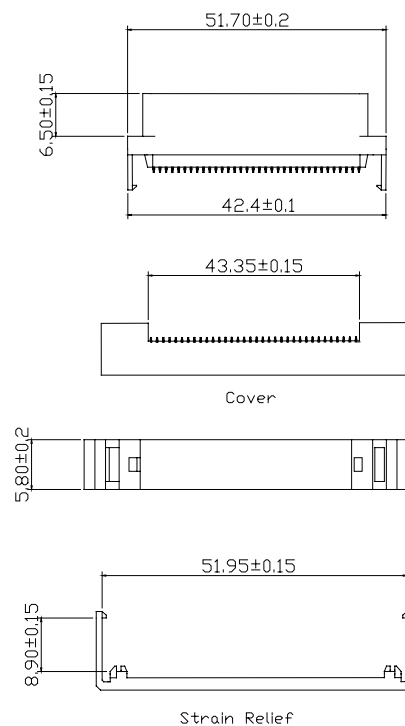

ORDER INFORMATION

☐ H	☐ P	☐ D	☐ B	☐ I	☐ -	☐ P	☐ M	☒ X	☒ X	☒ X	☐ B	☒ X	☐ -	☐ L			
P/Plastic Type							No. of contacts		☒ S/Selective ☐ SA/Selective 5u" ☐ SF/Selective 15u" ☐ SD/Selective 30u"			B/Block Insulator		☒ 1/With Strain Relief ☐ 2/No Strain Relief		L/RoHS P.B.T	

APPRO	CHECK	DRAWN	PART NO.	HPDBI-PMXXXBX-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	