



BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,8	1.0

SPECIFICATION


Current Rate: 1 AMP
 Insulation Resistance: 500mΩ Min
 Contact Resistance: 35mΩ Max
 Dielectric voltage: 500V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL


Insulator: Polyester, UL94v-0
 Standard: P.B.T
 Contact Pin: Brass Tin plated over copper

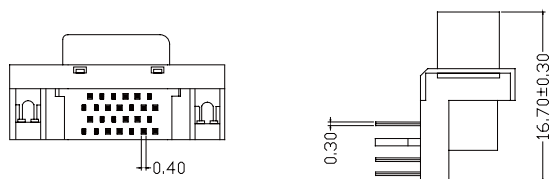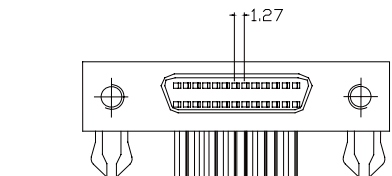



Without front latch

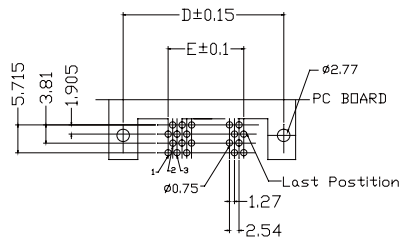


Recommended PCB Layout 26,50P
 (PCB TOLERANCE±0.05)

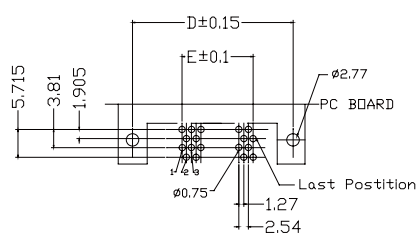

Recommended PCB Layout 68P
 (PCB TOLERANCE±0.05)

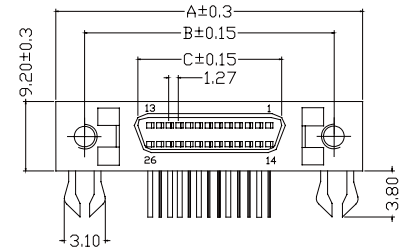


With front latch

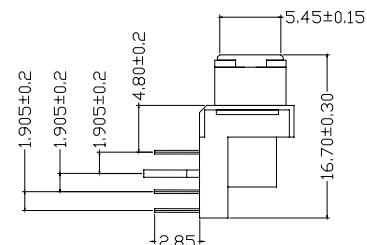

Dimensions

POSITION	A	B	C	D	E
26	37.19	31.26	19.45	31.26	15.24
50	52.43	46.50	34.70	46.50	30.48
68	63.86	57.93	46.13	57.93	41.91

ORDER INFORMATION

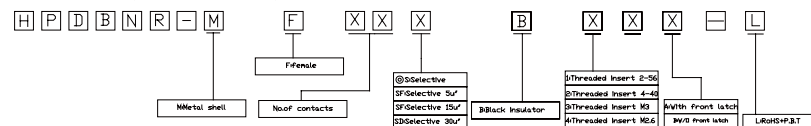

APPRO	CHECK	DRAWN	PART NO.	HPDBR-MFXXX BXXX-L		
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com