

SPECIFICATION

Current Rate: 5 AMP

Insulation Resistance: 1000m Ω Min

Contact Resistance: 20mΩ Max

Dielectric voltage: 1000V AC for one minute

Operation Temperature: -55°C to +105°C

MATERIAL











Insulator: Polyester,UL94v-0

©Standard: P.B.T

Contact Pin F: Phosphor Bronze

M: Brass

Shell-Steel zinc plated or tin plated or
nickel plated Screw-Brass nickel plated

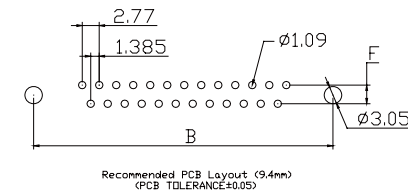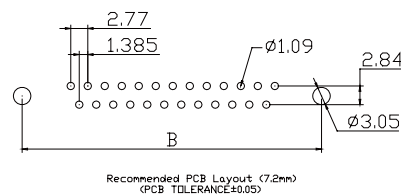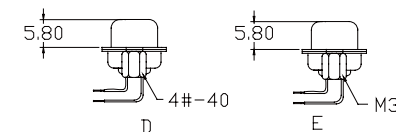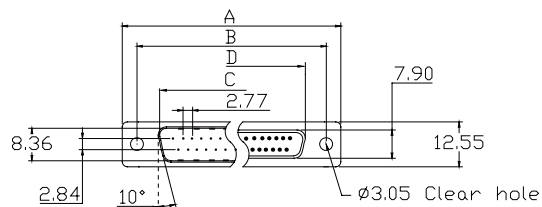

ORDER INFORMATION

[illegible]

Dimensions

POSITION	A	B	C	D	E
9	30.81	24.99	16.92	16.33	19.20
15	39.14	33.32	25.50	24.66	27.70
25	53.04	47.04	38.96	38.38	41.10
37	69.32	63.50	55.42	54.84	57.30

APPRO	CHECK	DRAWN	PART NO.	MDBRX-XXXXXXXXF-L			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com		