

SPECIFICATION

Current Rate: 5 AMP

Insulation Resistance: 1000m Ω MinContact Resistance: 20m Ω Max

Dielectric voltage: 1000V AC for one minute

Operation Temperature: -55°C to +105°C



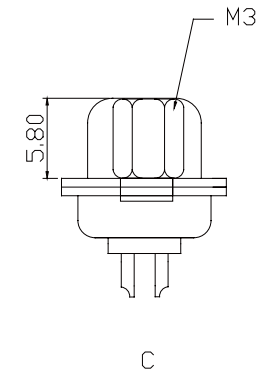
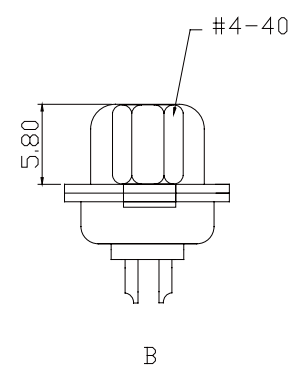

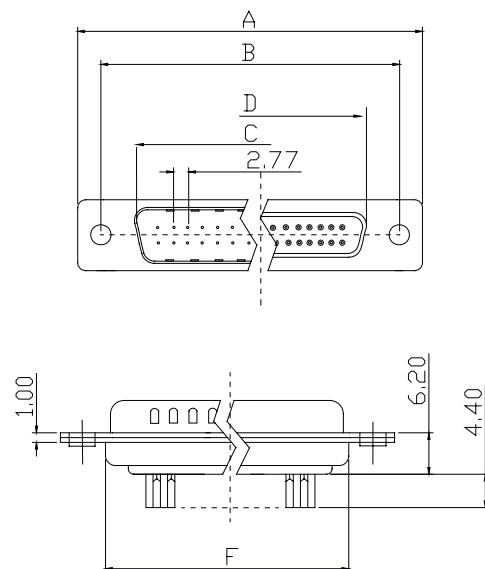
MATERIAL

Insulator: Polyester, UL94v-0

©Standard: P.B.T

Contact Pin F: Phosphor Bronze

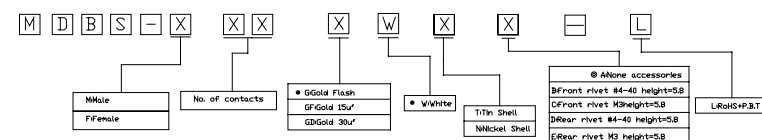
M: Brass

Shell-Steel zinc plated or tin plated or
nickel plated Screw-Brass nickel plated

Dimensions

POSITION	A	B	C	D	E	F
9	30.81	24.99	16.92	16.33	11.08	19.20
15	39.14	33.32	25.50	24.66	19.39	27.70
25	53.04	47.04	38.96	38.38	33.24	41.10
37	69.32	63.50	55.42	54.84	49.86	57.30

ORDER INFORMATION



APPRO

CHECK

DRAWN

PART NO.

MDBS-XXXXWXX-L

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com