





PAGE	219	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,8	1.0

SPECIFICATION


Current Rate: 5 AMP
Insulation Resistance: 1000mΩMin
Contact Resistance: 13mΩMax
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -55℃ to +105℃

MATERIAL


Insulator: Polyester,UL94v-0
©Standard: P.B.T
Contact Pin: Phosphor Bronze
Shell-Steel zinc plated or tin plated or
nickel plated Screw-Brass nickel plated

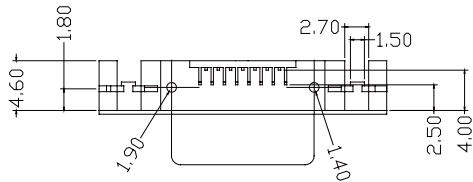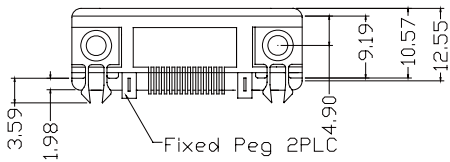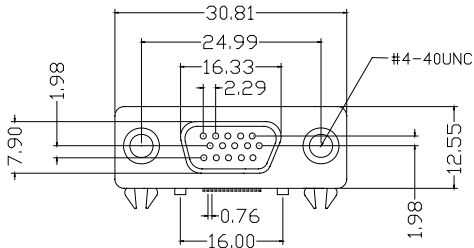


B



C





D



#4-40 UNC



#4-40 UNC

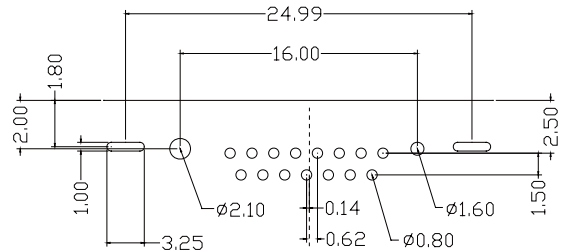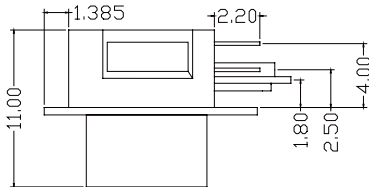

Pin Number:
6 11 2 8 13 4 10 15 17 12 3 9 14 5
Recommended PCB Layout
(PCB TOLERANCE±0.05)

ORDER INFORMATION

M	N	H	D	B	R	-	F	1	5	X	X	1	X	-	L
No. of contacts								SASelective 5u'	GAGold 5u'			Back Insulator	ifork grounding		LRHS-PBT
								SBSelective 10u'	GBGold 10u'			Blue Insulator			
								SCSelective 20u'	GCGold 20u'			Green Insulator			
								SDSelective 30u'	GDGold 30u'						
								TDTin 20u'	Tin Plated						

APPRO	CHECK	DRAWN	PART NO.	MNHDBR-F15XX1X-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	