




PAGE	229	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,10	1.0

SPECIFICATION

Current Rate: 5 AMP
Insulation Resistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -55℃ to +105℃

MATERIAL


Insulator: Polyester,UL94v-0
©Standard: P.B.T
Contact Pin F: Phosphor Bronze
M: Brass
Shell-Steel zinc plated or tin plated or
nickel plated Screw-Brass nickel plated

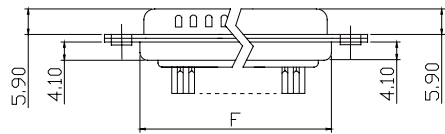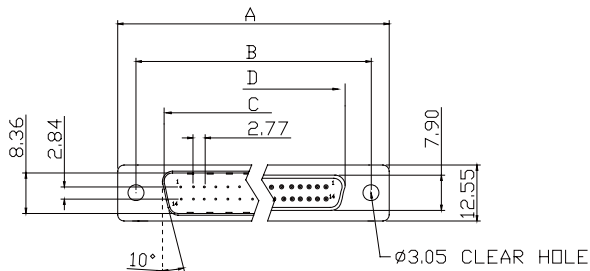


A

Dimensions


POSITION	A	B	C	D	E	F
9	30.81	24.99	16.92	16.33	11.08	19.20
15	39.14	33.32	25.50	24.66	19.39	27.70
25	53.04	47.04	38.96	38.38	33.24	41.10
37	69.32	63.50	55.42	54.84	49.86	57.30




B



C




#4-40



M3

ORDER INFORMATION

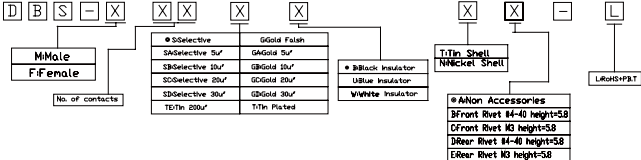

APPRO	CHECK	DRAWN	PART NO.	DBS-XXXXXXX-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
							Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	