

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 5 Amperes

Dielectric Withstanding Voltage: AC 1000

Insulation Resistance: 5000 Medohms Minimum

Contact Resistance: 25 Milliohms Maximum

Operating Temperature: -55°C to +105°C

MATERIALS

Contacts: Brass




Insulator: P.B.T UL 94V-0 Rated

Shell: Cold Roller Steel

FINISHES:

Contact: Gold Flash


Shell: Nickel Plated

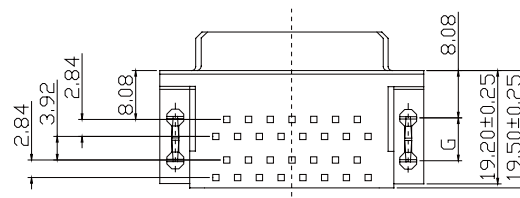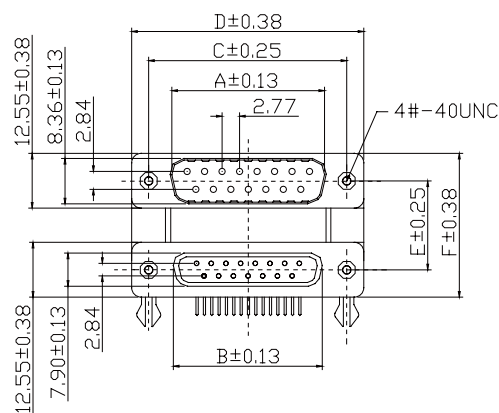


Dimensions

POSITION	A	B	C	D	E	F	G
9	16.92	16.33	24.99	30.81	15.88	28.40	7.00
15	25.25	24.66	33.32	39.14	19.05	31.60	8.00
25	38.96	38.38	47.04	53.04	22.86	35.40	8.00
37	55.42	54.84	63.54	69.32			

ORDER INFORMATION

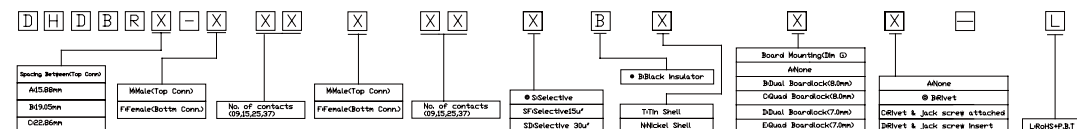

APPRO	CHECK	DRAWN	PART NO.	DHDBRX-XXXXXXXXBXXX-L			DESCRIPTION		
			ITEM NO.						
			DRAW NO.						
			UNIT	mm	SCALE	no			
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com		