







PAGE	222	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,8	1.0

SPECIFICATION


Current Rate: 3 AMP
Insulation Resistance: 1000mΩ Min
Contact Resistance: 20mΩ Max
Dielectric voltage: 1000V AC for one minute
Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: Polyester, UL94v-0
◎Standard: P.B.T
Contact Pin F: Phosphor Bronze
M: Brass
Shell-Steel zinc plated or tin plated or
nickel plated Screw-Brass nickel plated

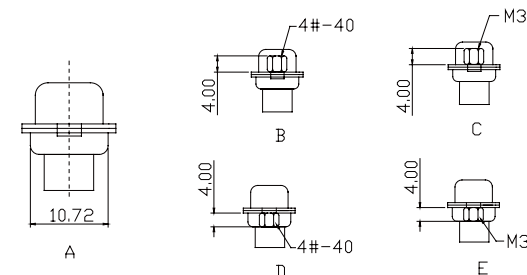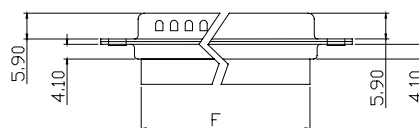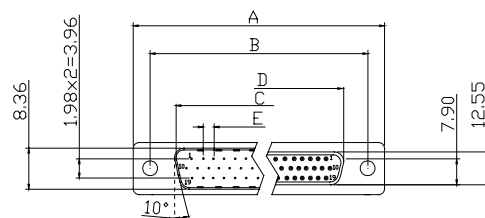

0.76 Crimp Pin Male Terminal
PART No.HDBC-MT-L

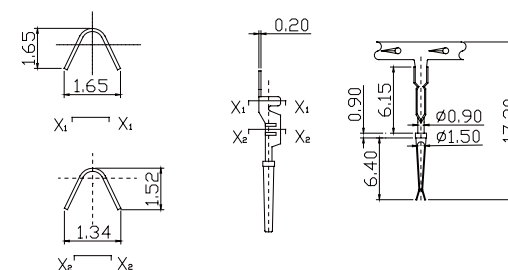


0.76 Crimp Pin Female Terminal
PART No.HDBC-FT-L

Dimensions

POSITION	A	B	C	D	E	F
15	30.81	24.99	16.92	16.33	2.29	19.20
26	39.14	33.32	25.50	24.66	2.29	27.70
44	53.04	47.04	38.96	38.38	2.29	41.10
62	69.32	63.50	55.42	54.84	2.41	57.30

ORDER INFORMATION

H	D	B	C	-	X	X	X	X	X	-	L
Male	Female	No. of contacts	Black Insulator	Tin Shell	Nickel Shell	Aluminum accessories	Front rivet M4-40 height=40	Current rivet M4-40 height=40	Decor rivet M4-40 height=40	Decor rivet M4 height=40	LEAD-P.B.T

APPRO	CHECK	DRAWN	PART NO.	HDBC-XXXXXX-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	