

SPECIFICATION

Current Rate: 3 AMP

Insulation Resistance: 1000mΩ Min

Contact Resistance: 20mΩ Max

Dielectric voltage: 1000V AC for one minute

Operation Temperature: -55°C to +105°C

MATERIAL




Insulator: Polyester, UL94v-0

©Standard: P.B.T

Contact Pin F: Phosphor Bronze


M: Brass

Shell-Steel zinc plated or tin plated or nickel plated Screw-Brass nickel plated

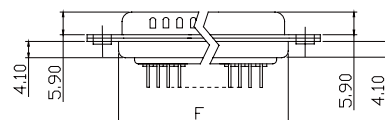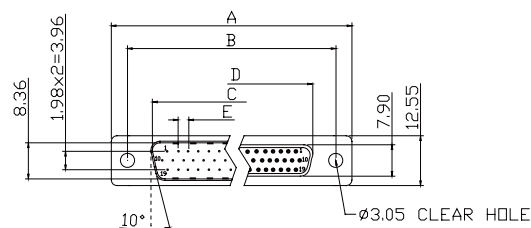


Dimensions


POSITION	A	B	C	D	E	F	G
15	30.81	24.99	16.92	16.33	2.29	19.20	0.25
26	39.14	33.32	25.50	24.66	2.29	27.70	0.51
44	53.04	47.04	38.96	38.38	2.29	41.10	0.51
62	69.32	63.50	55.42	54.84	2.41	57.30	0.58




B




C




D




E




F



G




Male



Female

Recommended PCB Layout
(PCB TOLERANCE±0.05)

ORDER INFORMATION



APPRO

CHECK

DRAWN

PART NO.

HDBD-XXXXXXX-L

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com