

SPECIFICATION

Current Rate: 1 AMP

Insulation Resistance: 2000m Ω Min

Contact Resistance: 20mΩ Max

Dielectric voltage: 500V AC for one minute

Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: P.B.T UL-94V-0 Black




Contact: Brass

Contact Plating: Gold on Contact Area,

and Tin plated or nickel plated

Metal Board Lock: Copper Alloy with Tin Plating

Shell: Zinc Alloy with Nickel Plating

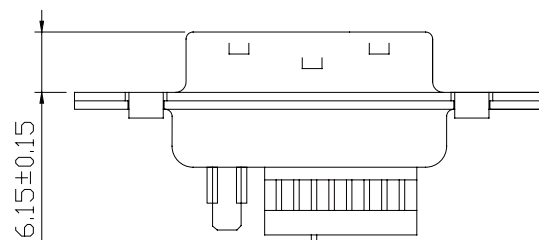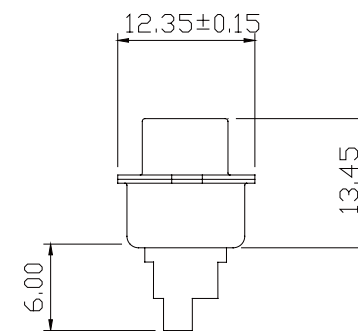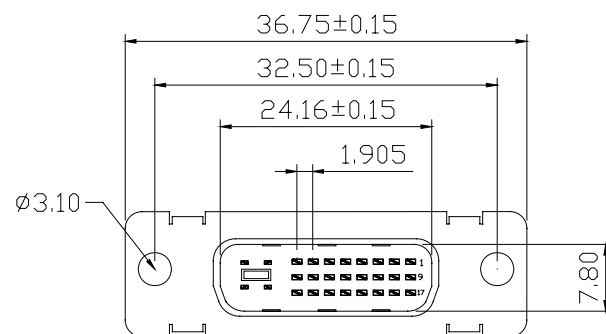

ORDER INFORMATION

D V I S - M 2 9 X B N A - L

No. of contacts

S\$elective 3u'
S\$elective 5u'
S\$elective 15u'
S\$elective 30u'

B\$Black Insulator

N\$Nickel Shell

A\$Non Accessories

L\$RHS+Mylon+P.B.T.

APPRO	CHECK	DRAWN	PART NO.	DVIS-M29XBNA-L			DESCRIPTION			
			ITEM NO.							
			DRAW NO.							
			UNIT	mm	SCALE	no				
TOLER		NO.			Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com					