








BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,10	1.0

SPECIFICATION

Current Rate: 1 AMP
 Insulation Resistance: 2000mΩ Min
 Contact Resistance: 20mΩ Max
 Dielectric voltage: 500V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: High Temperature
 Plastic UL-94V-0 Nature Color
 Contact: Phosphor Bronze
 Contact Plating: Gold on Contact Area,
 and Tin plated or nickel plated
 Metal Board Lock: Copper Alloy with Tin Plating
 Shell: Zinc Alloy with Nickel Plating

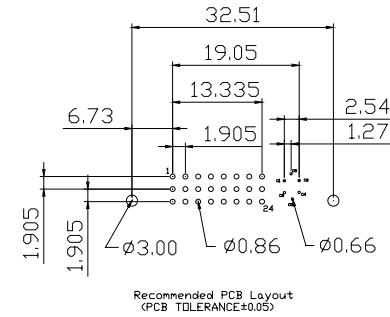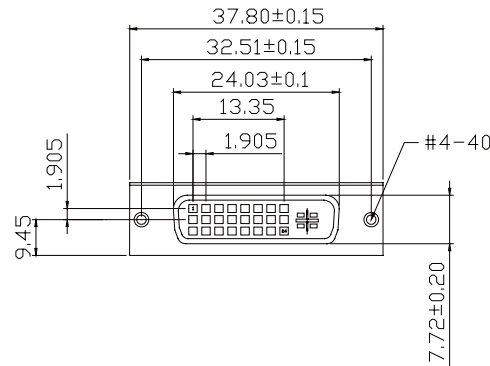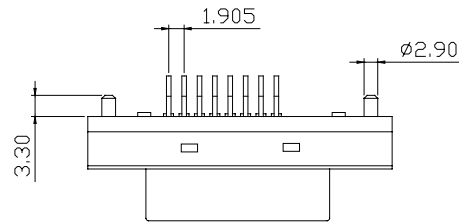

ORDER INFORMATION

D	V	I	S	-	F	2	9	X	W	N	X	=	L
No. of contacts								SSSelective SHSelective 3u' SASelective 5u' SFSelective 15u' SDSelective 30u'	WWhite Insulator NNickel Shell	BBlivet OOnlet & Jack screw attached BBlivet & Jack screw insert		LRAHS-Hyton 66	

APPRO	CHECK	DRAWN	PART NO.	DVIS-F29XWNX-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
				Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com				