

PAGE	242	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,10	1.0

SPECIFICATION

Current Rate: 1 AMP

Insulation Resistance: 2000mΩ Min

Contact Resistance: 20mΩ Max

Dielectric voltage: 500V AC for one minute

Operation Temperature: -55℃ to +105℃

MATERIAL





Insulator: P.B.T UL-94V-0 Black

Contact: Brass

Contact Plating: Gold on Contact Area, and Tin plated or nickel plated

Metal Board Lock: Copper Alloy with Tin Plating

Shell: Zinc Alloy with Nickel Plating

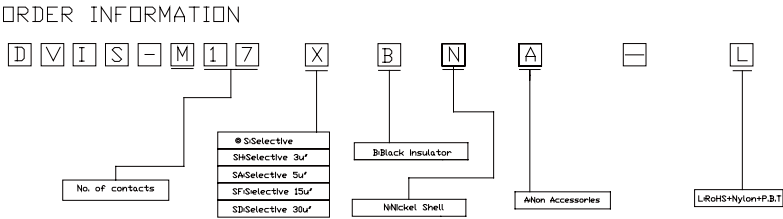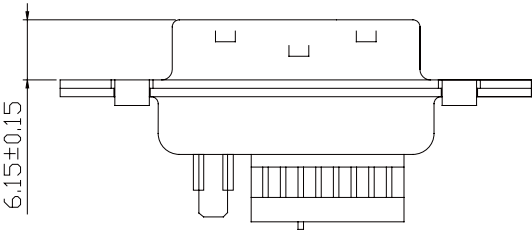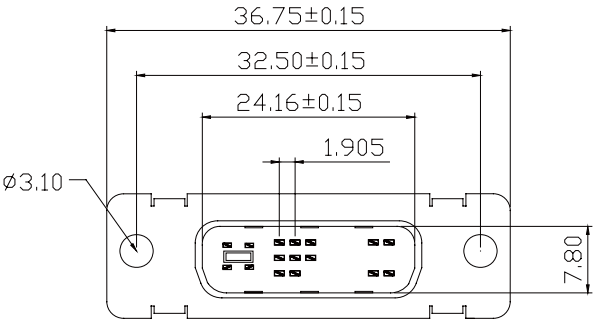

APPRO	CHECK	DRAWN	PART NO.	DVIS-M17XBNA-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	