PAGE	244

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,10	1.0

SPECIFICATION
Current Rate: 1 AMP
Insulation Resistance: 2000mΩMin
Contact Resistance: 20mΩMax
Dielectric voltage: 500V AC for one minute
Operation Temperature: -55℃to +105℃

MATERIAL
Insulator: P.B.T UL-94V-0 Black
Contact: Brass
Contact Plating: Gold on Contact Area,
and Tin plated or nickel plated
Metal Board Lock: Copper Alloy with Tin Plating
Shell: Zinc Alloy with Nickel Plating

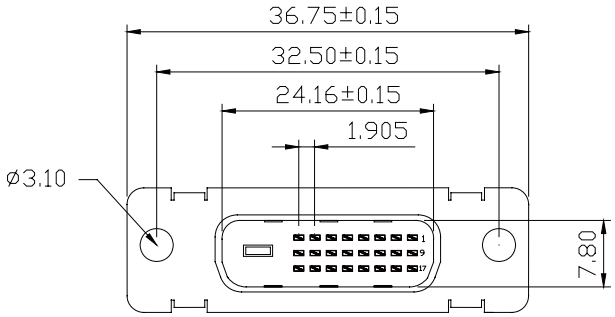



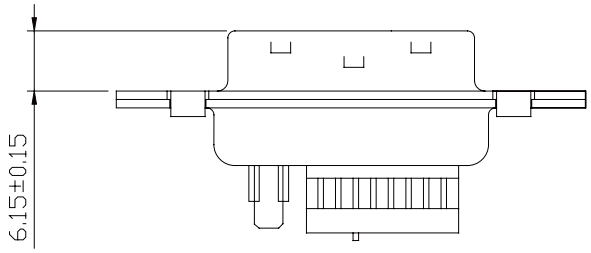

ORDER INFORMATION

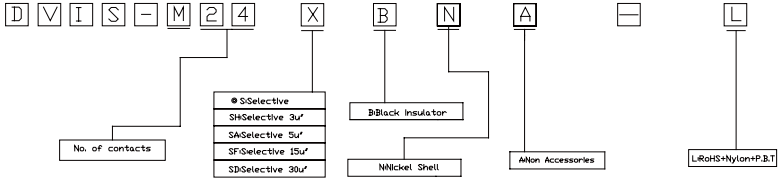

APPRO	CHECK	DRAWN	PART NO.	DVIS-M24XBNA-L			DESCRIPTION
			ITEM NO.				
			DRAW NO.				
			UNIT	mm	SCALE	no	
			TOLER		NO.		

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com