


NETS:

- 1.MECHANIAL;
  - MATING:35N MAX
  - WITHDRAWAL:10N.MIN
  - DURABILTY:1500 CYCLES.MIN.
- 2.ELECTRICAL:
  - CURRENT:1..MAX.FOR PIN1.AND PIN10.AND0.25.
  - FOR.ALL.THE.OTHER PINS
  - VOLTAGE:30V.MAX
  - WITHSTANDING.VOLTAGE:100.AC
  - CONTACT.PESISTANCE:100MΩMIN
- 3.ENVIPONEMNTAL
  - TEMPERATURE.RANCE-55°C--+85°C
- 4.PRODUCT:MEET FOR ROHS.STANDAR

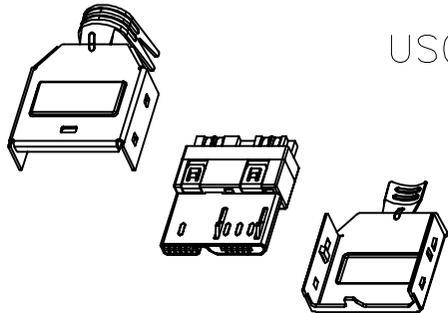

US010BMXSX-001-01

- N:NY9T
- L:LCP
- P:PBT
- 1:5U"半金雾锡
- 2:3u"半金雾锡
- 3:10u"半金雾锡
- 4:15u"半金雾锡
- 5:30u"半金雾锡

REV.	ECN. NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN

ITEM	PART,NAME	Q'TY	METERIAL
1	FRONT.SHELL	1	SPCC.NI.100U" MIN
2	BACK.SHELL	1	SPCC.OD=5.5.NI 100U" MIN
3	CONTACT	10	C5191R-H.GOLD.5u"
4	SEMI-PRODUCT	1	PBT+30%GF.BLUE
INTENDED USE		UNIT : mm	华捷科技有限公司
PART NO.		FINISH	
TOLERANCES		MAT'L	FILE NO. US010AMXSX-001-01 TITLE: MICRO USB3. OBM 三件套 APPD: _____ DWG NO.: _____ CHKD: _____ REC. CONNECTOR DR: Gary.Lee SCALE 1;1 SHEET 1 OF 1