
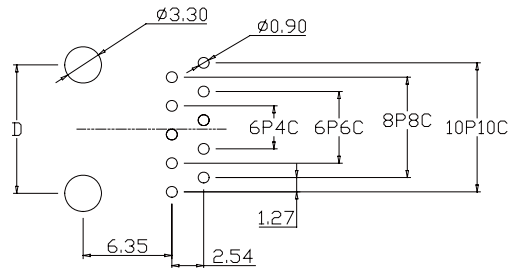

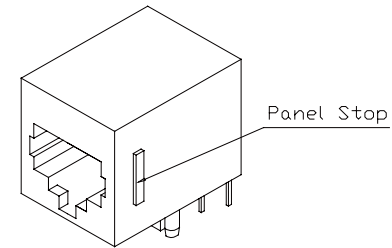




PAGE	407	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,12	1.0

MATERIAL & FINISH


HOUSING: Glass Fiber, PBT. UL94V-0, BLACK
CONTACT: 0.35mm thickness phosphor bronze,
Gold plated over Nickel on contact area,
Tin plated over Nickel on solder area.




Recommended PCB Layout
(PCB TOLERANCE±0.05)




With Eay



Without Eay



With keyway
(8P or 10P only)

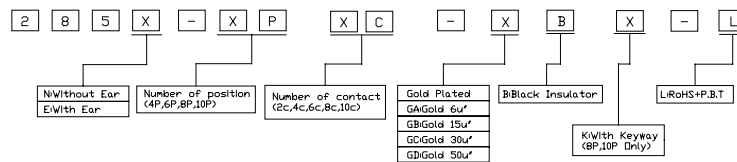

POSITION	CONTACT	A	B	C	C
4P	4C	13.50	11.30	7.80	7.60
6P	2C/4C/6C	15.60	13.20	9.00	10.16
8P	8C	17.50	15.00	12.00	11.43
10P	10C	17.50	15.00	12.00	11.43

APPRO	CHECK	DRAWN	PART NO.	285X-XPXC-XBX-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
							Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	