
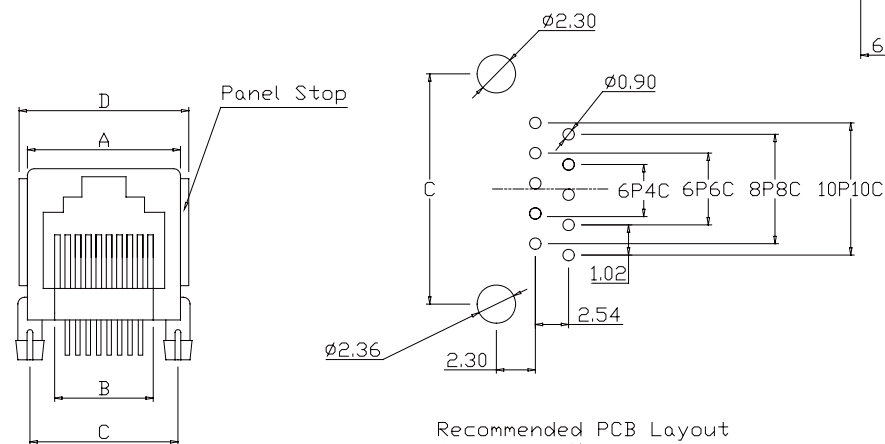

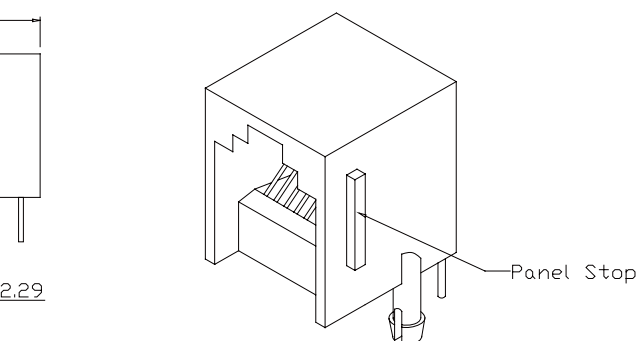


MATERIAL & FINISH




HOUSING: Glass Fiber, PBT, UL94V-0, BLACK

CONTACT: 0.45mm thickness phosphor bronze,
Gold plated over Nickel on contact area,
Tin plated over Nickel on solder area.Recommended PCB Layout
(PCB TOLERANCE±0.05)

Without Ear



With Ear

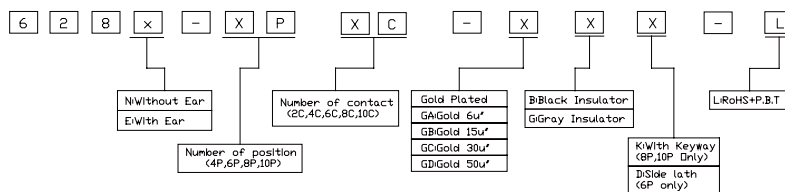Without keyway
(8p & 10P only)Side latch
(6P only)

Position	contact	A	B	C	D
4P	4C	10.00	7.85	10.00	12.00
(6P)4P	4C	12.20	7.85	12.00	14.20
6P	2C/4C/6C	12.20	9.90	12.00	14.20
8P	8C	15.00	11.85	15.00	16.90
10P	10C	15.00	11.85	15.00	16.90

APPRO

CHECK

DRAWN

PART NO.

628X-XPXC-XXX-L

ITEM NO.

DRAW NO.

UNIT

mm

SCALE

no

TOLER

NO.

DESCRIPTION



Tel: 0769 22020068 Fax: 0769 22020069

E-mail: sales@vigortec.com