PAGE	415

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
ALLEN		RELEASE TO PRODUCTION	2007,9,12	1.0

MATERIAL & FINISH
HOUSING: Glass Fiber, PBT. UL94V-0, BLACK
CONTACT: 0.35mm thickness phosphor bronze,
Gold plated over Nickel on contact area,
Tin plated over Nickel on solder area.





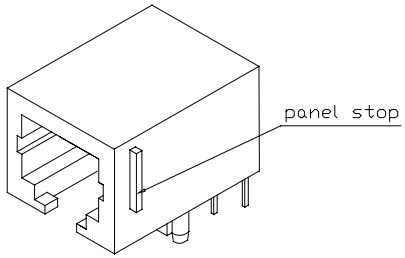



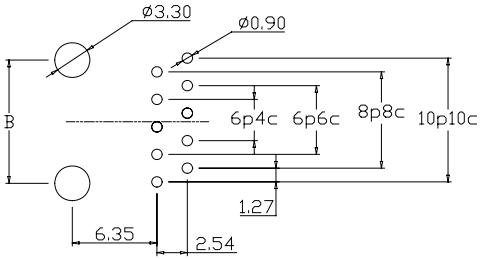

Recommended PCB Layout
(PCB TOLERANCE±0.05)

Without Eay



With Eay



With keyway
(8P,10P only)

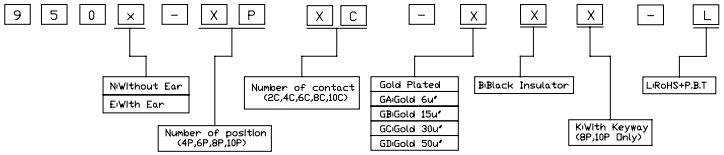

POSITION	CONTACT	A	B	C	D
4P	4C	11.20	7.60	7.80	13.70
6P	2C/4C/6C	13.20	10.16	10.00	15.70
8P	8C	15.20	11.43	12.00	17.70
10P	10C	15.20	11.43	12.00	17.70

APPRO	CHECK	DRAWN	PART NO.	950X-XPXC-XBX-L		
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	

DESCRIPTION

Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com