
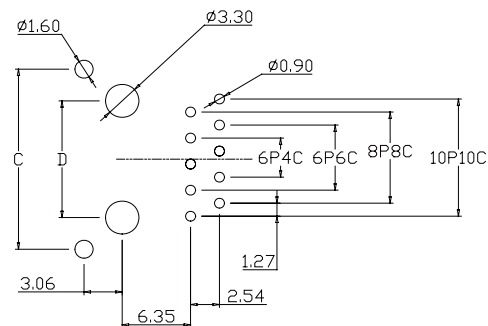






PAGE	423	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,12	1.0

MATERIAL & FINISH

HOUSING: Glass Fiber, PBT, UL94V-0
CONTACT: 0.35mm thickness phosphor bronze,
Gold plated over Nickel on contact area,
Tin plated over Nickel on solder area.

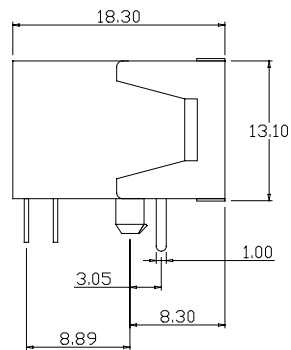

Recommended PCB Layout
(PCB TOLERANCE±0.05)

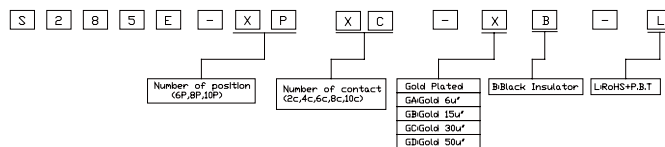

POSITION	CONTACT	A	B	C	D	E
6P	2C/4C/6C	15.60	13.65	13.40	10.16	9.90
8P	8C	15.70	15.65	15.40	11.43	11.85
10P	10C	15.70	15.65	15.40	11.43	11.85

APPRO	CHECK	DRAWN	PART NO.	S285E-XPXC-XB-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
							Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	