
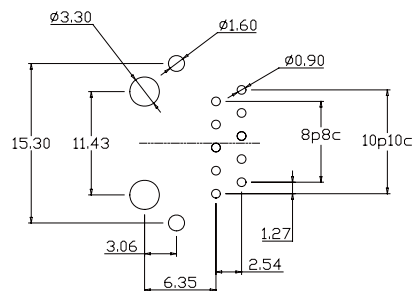










PAGE	424	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,12	1.0

MATERIAL & FINISH


HOUSING: Glass Fiber, PBT, UL94V-0
CONTACT: 0.35mm thickness phosphor bronze,
Gold plated over Nickel on contact area,
Tin plated over Nickel on solder area.



Recommended PCB Layout
(PCB TOLERANCE±0.05)

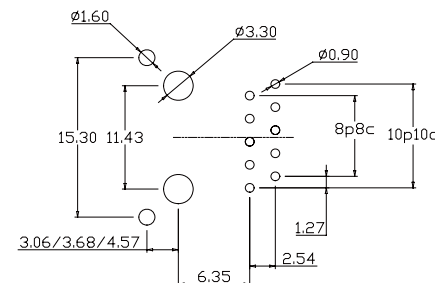

Recommended PCB Layout
(PCB TOLERANCE±0.05)

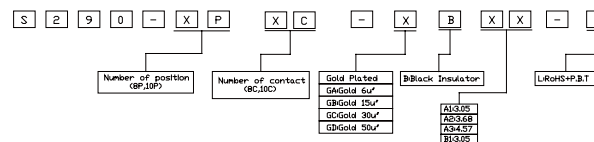

APPRO	CHECK	DRAWN	PART NO.	S290-XPXC-XBXX-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.		Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	