

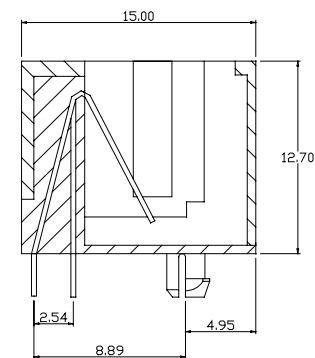



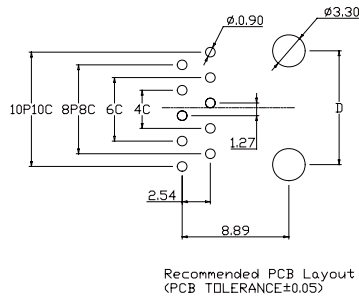




PAGE	403	BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		ALLEN		RELEASE TO PRODUCTION	2007,9,12	1.0

MATERIAL & FINISH
HOUSING: Glass Fiber, PBT, UL94V-0, BLACK
CONTACT: 0.35mm thickness phosphor bronze,
Gold plated over Nickel on contact area,
Tin plated over Nickel on solder area.

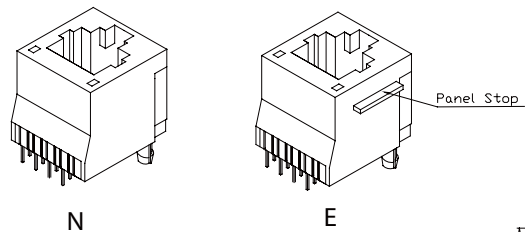

position	conductor	A	B	C	D
4P	4C	14.00	11.20	7.90	7.62
6P	2C/4C/6C	16.00	13.20	9.90	10.16
〈8P〉6P	2C/4C/6C	18.00	15.20	9.90	11.43
8P	4C/6C/8C	18.00	15.20	11.90	11.43
10P	10C	18.00	15.20	11.90	11.43

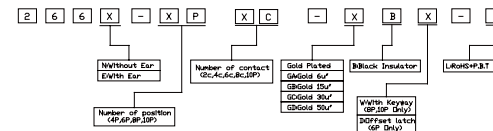

APPRO	CHECK	DRAWN	PART NO.	264X-XPXC-XBX-L			DESCRIPTION	
			ITEM NO.					
			DRAW NO.					
			UNIT	mm	SCALE	no		
			TOLER		NO.			
							Tel: 0769 22020068 Fax: 0769 22020069 E-mail: sales@vigortec.com	