
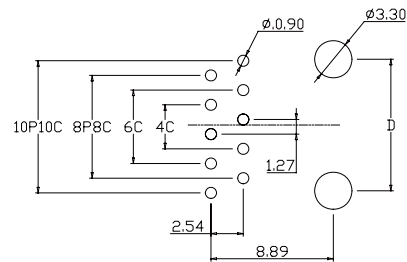
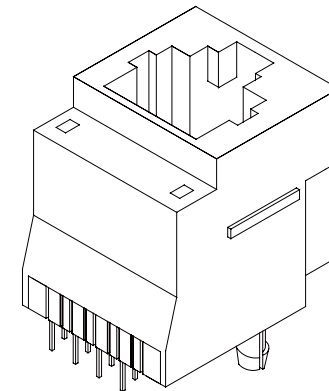







MATERIAL & FINISH

HOUSING: Glass Fiber, PBT, UL94V-0, BLACK
 CONTACT: 0.35mm thickness phosphor bronze,
 Gold plated over Nickel on contact area,
 Tin plated over Nickel on solder area.



Recommended PCB Layout
 (PCB TOLERANCE±0.05)

position	conductor	A	B	C	D
4P	4C	13.80	11.20	7.90	7.62
6P	2C/4C/6C	15.80	13.20	10.00	10.16
(8P)6P	2C/4C/6C	18.00	15.20	10.00	11.43
8P	8C	18.00	15.20	11.80	11.43
10P	10C	18.00	15.20	11.80	11.43

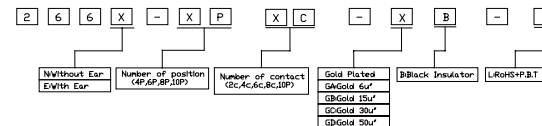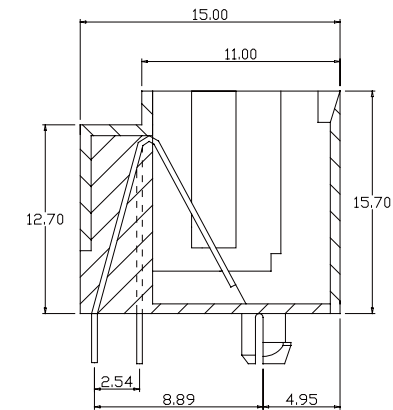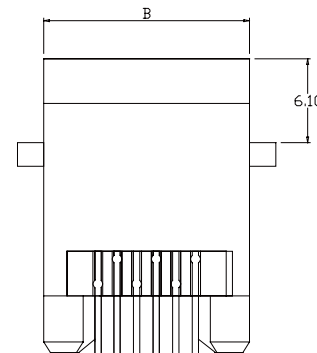

APPRO	CHECK	DRAWN	PART NO.	266X-XPXC-XB-L		
			ITEM NO.			
			DRAW NO.			
			UNIT	mm	SCALE	no
			TOLER		NO.	

DESCRIPTION

